

(Hollowcore Finishes)

A. Slab with Timber floor Finish




- Timber floor finish fixed to timber battens
- Timber Battens fixed to smooth finished slab
- Minimum 30 N/10 grout/concrete in joints between slabs
- Timber Battens fixed to soffit of slab
- Counter Battens fixed to battens to allow for services
- Plasterboard ceiling fixed to Counter Battens

B. Slab with Structural Screed and Timber floor Finish



- Timber floor finish fixed to timber battens
- Timber Battens fixed to Structural Screed
- Structural Screed poured over slabs
- Minimum 30 N/10 grout/concrete in joints between slabs
- Timber Battens fixed to soffit of slab
- Counter Battens fixed to battens to allow for services
- Plasterboard ceiling fixed to Counter Battens

C. Slab with Underfloor Heating and Tiled floor Finish

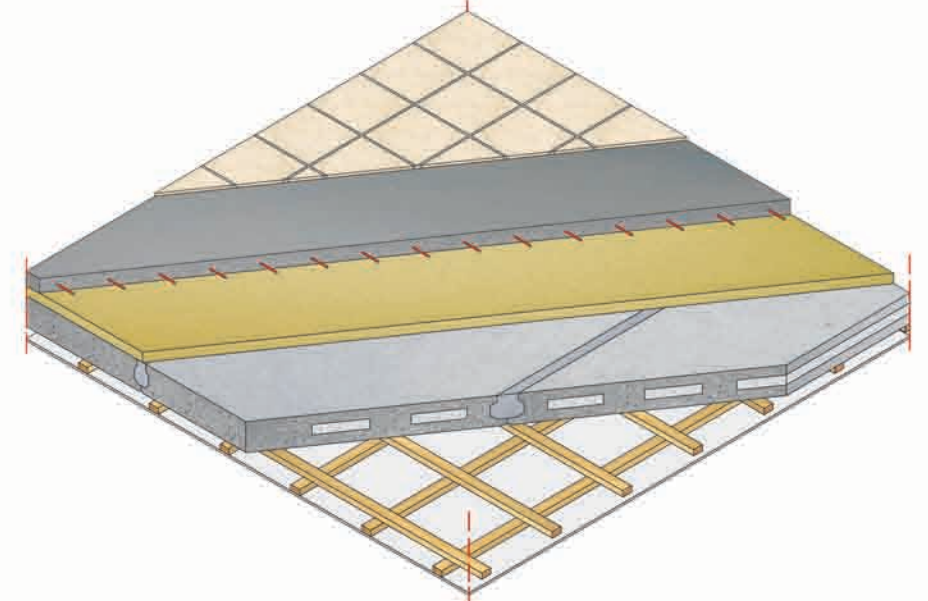

- Tiled floor finish fixed to Screed
- Screed poured over Underfloor Heating pipes
- Underfloor Heating pipes placed on rigid insulation boards
- Rigid Insulation boards placed directly on concrete slab
- Minimum 30 N/10 grout/concrete in joints between slabs
- Timber Battens fixed to soffit of slab
- Counter Battens fixed to battens to allow for services
- Plasterboard ceiling fixed to Counter Battens